

## IGS-800C

8x GbE RJ45, Low profile size



- EN50121-4, EN61000-6-2, EN61000-6-4, CE, FCC certified
- 12/24/48VDC (9.6~60VDC) redundant dual input power
- Low profile size, IP30, rugged metal housing, fanless



Ver.2022 Jan

The IGS-800C is a low profile, 8 Ports unmanaged Gigabit Ethernet switch, that provides stable and reliable Ethernet transmission. Housed in rugged DIN rail or wall mountable enclosures, the switch is designed for harsh environments, such as industrial networking, intelligent transportation systems (ITS) and is also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications (See Figure). Standard operating temperature range models (-10 to 60°C) and wide operating temperature range models (-40 to 70°C) fulfill the special needs of industrial automation applications.

### Features

- Supports flow control
- Jumbo frame support
- Supports auto-negotiation and auto-MDI/MDI-X
- Supports DIN Rail or wall mounting installation
- Wide operating temperature -40~70°C (-E model)

### Specifications


<b>IEEE Standard</b>	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX, 100Base-FX, Fast Ethernet IEEE 802.3ab 1000Base-T Gbit/s Ethernet over twisted pair IEEE 802.3x Flow Control IEEE 802.3z 1000Base-X Gbit/s Ethernet over Fiber-Optic									
<b>Switch Architecture</b>	Back-plane (Switching Fabric): 16 Gbps Full wire-speed									
<b>Data Processing</b>	Store and Forward									
<b>Flow Control</b>	IEEE 802.3x flow control for Full duplex, back pressure for half duplex									
<b>Jumbo Frame</b>	9K Bytes									
<b>MAC Address Table</b>	4K									
<b>Network Connector</b>	8 x 10/100/1000Base-T RJ-45 10/100/1000Base-TX auto negotiation speed, Auto MDI/MDI-X function, Full/Half duplex									
<b>Network Cable</b>	UTP/STP Cat. 5 cable or above EIA/TIA-568 100-ohm (100meter)									
<b>Protocols</b>	CSMA/CD									
<b>LED</b>	Per unit: Power 1 (Green), Power 2 (Green) Per RJ45: Link/Act 1000 (Yellow), Link/Act 10/100 (Green)									
<b>Reverse Polarity Protection</b>	Supported for Power Input									
<b>Overload Current Protection</b>	Supported									
<b>Power Supply</b>	Redundant Dual DC 12/24/48V (9.6~60VDC), Input power (Removable Terminal Block)									
<b>Power Consumption</b>	<table border="1"> <thead> <tr> <th>Input</th> <th>IGS-800C</th> </tr> </thead> <tbody> <tr> <td>12VDC</td> <td>3.9W</td> </tr> <tr> <td>24VDC</td> <td>4.6W</td> </tr> <tr> <td>48VDC</td> <td>6.8W</td> </tr> </tbody> </table>	Input	IGS-800C	12VDC	3.9W	24VDC	4.6W	48VDC	6.8W	
Input	IGS-800C									
12VDC	3.9W									
24VDC	4.6W									
48VDC	6.8W									
<b>Removable Terminal Block</b>	Provides 2 redundant power, 4 Pin									
<b>Operating Temperature</b>	-10°C~60°C (IGS-800C) -40°C~70°C (IGS-800C-E)									

<b>Operating Humidity</b>	5% to 95% (Non-condensing)
<b>Storage Temperature</b>	-40 ~ 85°C
<b>Housing</b>	Rugged Metal, IP30 Protection and fanless
<b>Dimensions</b>	100 x 42x 115mm (D x W x H)
<b>Weight</b>	0.71kg
<b>Installation Mounting</b>	DIN Rail mounting, or wall mounting (Optional)
<b>MTBF</b>	2,442,195 Hours
<b>Warranty</b>	5 years
<b>Certification</b>	
<b>EMC/EMS</b>	CE (EN55024, EN55032)
<b>EMI (Electromagnetic Interference)</b>	FCC Part 15 Subpart B Class A, CE
<b>Railway Traffic</b>	EN50121-4
<b>Immunity for Heavy Industrial Environment</b>	EN61000-6-2
<b>Emission for Heavy Industrial Environment</b>	EN61000-6-4
<b>EMS (Electromagnetic Susceptibility) Protection Level</b>	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A
<b>EMS (Electromagnetic Susceptibility) Protection Level</b>	EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
<b>Shock</b>	IEC 60068-2-27
<b>Freefall</b>	IEC 60068-2-32
<b>Vibration</b>	IEC 60068-2-6

7

Industrial Unmanaged GbE Switch IGS-800C

## Dimensions

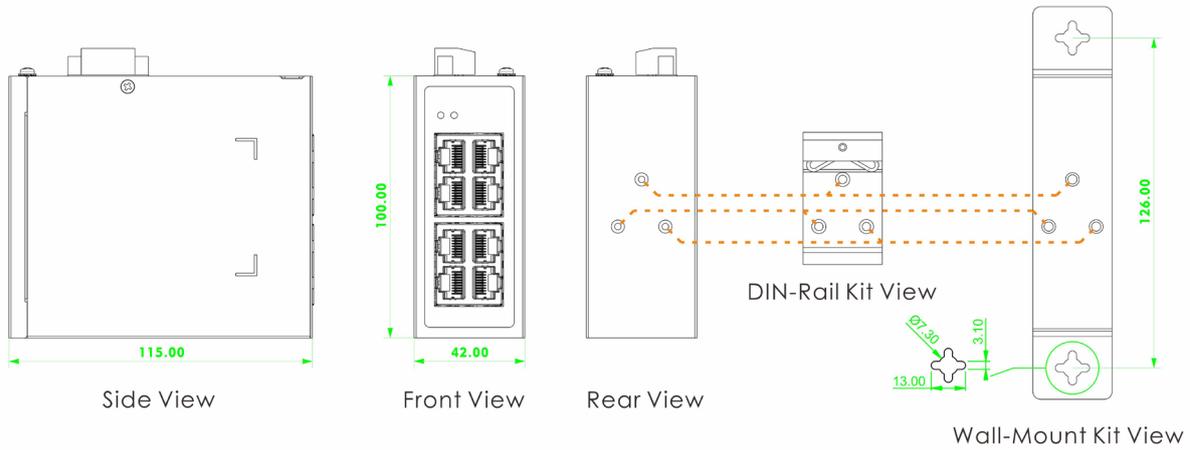

## Ordering Information

Model Name	Total Port	RJ45 UTP port	Fiber Port	Power Input	Certification				Operating Temperature
		10/100/1000 Base-T	100/1000Base-X	Redundant	Railway EN50121-4	EN61000-6-2 EN61000-6-4	CE	FCC	
IGS-800C	8	8		12/24/48VDC	V	V	V	V	-10~60°C
IGS-800C-E	8	8		12/24/48VDC	V	V	V	V	-40~70°C

### Package List

- IGS-800C device
- Din Rail with screws
- Terminal block

## Optional Accessories

### Wall Mount Kit

IND-WMK03	Wall Mount kit for Industrial product (Compact, 150 x 30mm)
-----------	---

### Industrial Power Supply

MDR-20-24	Industrial Power, Input 85 ~ 264VAC/120 ~ 370VDC, Output 24VDC, 24W, -20 ~ +70°C
MDR-40-48	Industrial Power, Input 85 ~ 264VAC/120 ~ 370VDC, Output 48VDC, 40W, -20 ~ +70°C